


NF-S1 Quattro Silver | unit mm | RoHS

CROSS SECTION VIEW




scale 5:1

TECHNICAL VIEW

NF-S1 Quattro Silver

| | |
|------------------|--|
| Inner Conductor: | Cu-ETP1, tinned, 19 x 0.185 mm, max. 39 Ω/km |
| Capacity: | conductor: 50 pF/m, screen: 100 pF/m |
| Isolation: | PE, Ø 2.5 ± 0.1 mm |
| Filler: | 2 x white PE tube |
| Shielding: | foil1: ALU-PETP, spiral screen 1: Cu 0.15 mm silvered, foil2: ALU-PETP, spiral screen 2: Cu 0.15 mm silvered, |
| Outer sheath: | PVC, Ø 8.0 ± 0.3 mm |

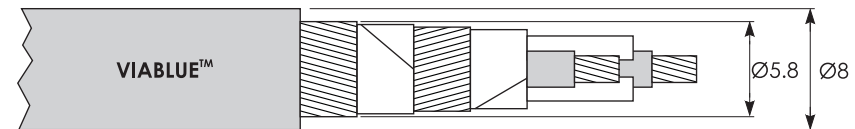

scale 2:1