


TVR 120 dB Silver | unit mm | RoHS

CROSS SECTION VIEW



scale 5:1

TECHNICAL DETAILS


TVR 120 dB Silver

Impedance: $75 \pm 2 \Omega$
 Capacity: 52 pF/m
 Inner Conductor: 1.02 mm Cu blank, 22.0 Ω /km
 Dielectric: PEGJ 4.6 mm \pm 0.1 mm
 Shielding: foil 1: AL/PETP-Digital, braid 1: 85% Cu, silver plated
 foil 2: AL/PET/AL, braid 2: 85% Cu, silver plated

Resistance shielding: 5.7 Ω /km

Attenuation:

50 MHz	<	4.6 dB / 100 m
100	<	6.1
230	<	9.5
470	<	13.5
860	<	18.6
1000	<	21.2
1350	<	24.5
1750	<	28,9
2050	<	31.2
2150	<	32.4
2400	<	34.5

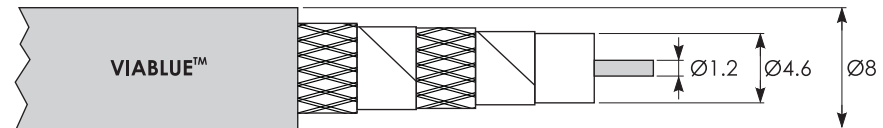

scale 2:1