


NF-75 Silver Digital | unit mm | RoHS

CROSS SECTION VIEW




scale 5:1

TECHNICAL DETAILS

NF-75 Silver Digital

Impedance	75 ± 2 Ω	
Capacity	52 ± 2 pF/m	
Inner Conductor	CUSn 7x 0.4 mm ² , 19 Ω/km	
Dielectric	PEGJ, Ø 4.6 mm	
Shielding	foil: AL3 100%, braid: CuAg 90% (24x8x0.10), shielding 100-900 MHz: > 95 dB, resistance: 9 Ω/km	
Outer sheath:	PVC	
Attenuation:	1 MHz	0.7 dB x 100m
	10	2.5
	50	5.5
	100	7.5
	300	14.7
	800	21.0

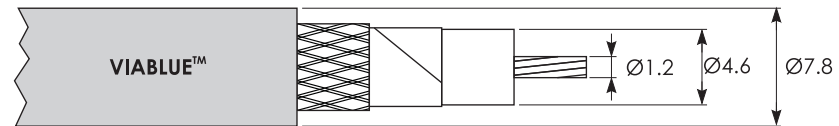

scale 2:1