


**TVR 120 dB Silver | unit mm | RoHS**

**CROSS SECTION VIEW**



scale 5:1

**TECHNICAL DETAILS**


**TVR 120 dB Silver**

Impedance:  $75 \pm 2 \Omega$   
 Capacity: 52 pF/m  
 Inner Conductor: 1.02 mm Cu blank, 22.0  $\Omega$ /km  
 Dielectric: PEGJ 4.6 mm  $\pm$  0.1 mm  
 Shielding: foil 1: AL/PETP-Digital, braid 1: 85% Cu, silver plated  
 foil 2: AL/PET/AL, braid 2: 85% Cu, silver plated

Resistance shielding: 5.7  $\Omega$ /km

Attenuation:

50 MHz	<	4.6 dB / 100 m
100	<	6.1
230	<	9.5
470	<	13.5
860	<	18.6
1000	<	21.2
1350	<	24.5
1750	<	28,9
2050	<	31.2
2150	<	32.4
2400	<	34.5

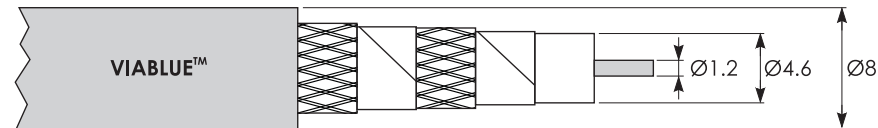

scale 2:1