



NF-S1 Quattro Silver | scale 1:1 | unit mm | aluminium | RoHS

CROSS SECTION VIEW


scale 5:1

TECHNICAL VIEW
NF-S1 Quattro Silver

Inner Conductor:	Cu-ETP1, tinned, 19 x 0.185 mm, max. 39 Ω /km
Capacity:	conductor: 50 pF/m, screen: 100 pF/m
Isolation:	PE, \varnothing 2.5 \pm 0.1 mm
Filler:	2 x white PE tube
Shielding:	foil1: ALU-PETP, spiral screen 1: Cu 0.15 mm silvered, foil2: ALU-PETP, spiral screen 2: Cu 0.15 mm silvered,
Outer sheath:	PVC, \varnothing 8.0 \pm 0.3 mm

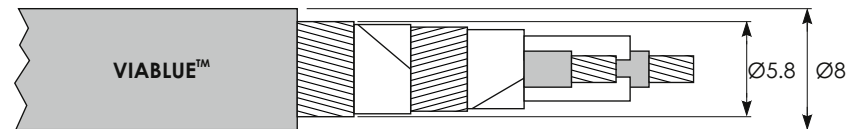

scale 2:1