



NF-S2 Silver Digital | scale 1:1 | unit mm | aluminium | RoHS

CROSS SECTION VIEW


scale 5:1

TECHNICAL VIEW
NF-S2 Silver Digital

Inner Conductor:	Cu-ETP1, tinned, 19 x 0.185 mm, max. 39 Ω/km
Capacity:	conductor: 47 pF/m, screen: 95 pF/m
Impedance:	nom. 110 Ω
Isolation:	PE, Ø 2.8 ± 0.1 mm
Filler:	2 x white PE tube
Shielding:	foil: ALU-PETP spiral screen: Cu 0.15 mm silvered,
Outer sheath:	PVC, Ø 8.0 ± 0.3 mm

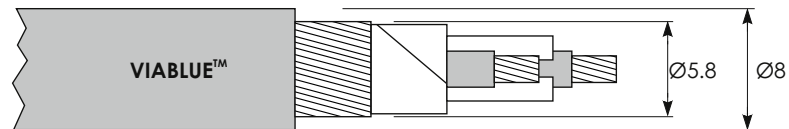

scale 2:1